

# SW150 Standard Wax

## Economical Printing with Consistent Performance



Food/Beverage



Health/Beauty



Logistics



Retail

### Benefits

- Handles basic applications with ease
- Reliable, economical wax ink
- Good print quality on low end paper tag and label stocks
- High wax content allows for lower printer darkness settings
- Print speeds up to 12 IPS
- Specially formulated backcoat protects the printhead

### Recommended Stocks

#### Paper

- Vellum
- Matte Coated

### Applications

- Component identification
- Product identification
- Shipping
- Warehousing
- Work in Process (WIP)

### Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW200	GP725 High Mark DC100	PM250 Prime Mark DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NET330

### Technical Specifications

Film Thickness ..... 4.5 Microns  
 Total Ribbon Thickness ..... 7.5 Microns  
 Transmission Density ..... 1.73 MacBeth Scale  
 Ink Melting Point ..... 67°C / 152°F

### Imaging Characteristics

Printer ..... Flathead  
 Max Print Speed ..... 12 IPS (305 mm/s)  
 Image Darkness ..... 1.3 RD (densitometer)

### Compliance

- REACH – SVHC Free
- RoHS/WEEE
- California Proposition 65
- Additional Regulatory Requirements Upon Request


### Sample SKUs

Part # CES11031 - 110 mm x 50 m - CSI  
 Part # CES11030 - 110 mm x 50 m - CSO

### Storage Conditions

12 months recommended  
 20-85% Relative Humidity Rate, 23-104°F (-5-40°C)

### Performance Ratings

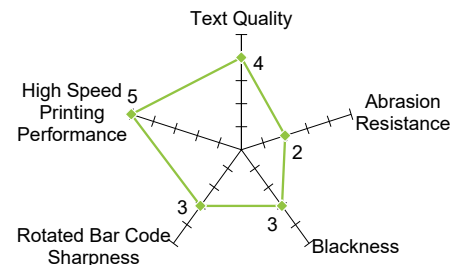

310 Commerce Drive • Amherst, NY 14228  
 Toll-Free: 888.464.4625 • Phone: 716.691.6333  
[salesinfo@iimak.com](mailto:salesinfo@iimak.com) • [www.iimak.com](http://www.iimak.com)